ISOCEM[®]: New Generation of Case Hardening Steels

Competitive, flexible, ecological and predictable/reliable manufacturing processes







Steels for Transmission Components

- Components such as shafts, gears and pinions must combine:
 - High Surface Hardness to guarantee wear resistance
 - Toughness Core
- Low carbon MnCr, CrMo or NiCrMo alloyed steels are carburised and quenched
- During carburising some **distortions are generated** and must be corrected by costly finishing operations





Ssidenor

ISOCEM® Applications

- Cost effective new case hardening steels designed for:
 - High hardenability
 - Substitute high alloy grades (Cr-Ni-Mo) with same properties
 - Excellent response in gas quenching process
 - Reduce distorsions after quenching process






High Hardenability

• Steels with **adapted hardenability** that ensure final properties in gas quenching processes

Ssidenor

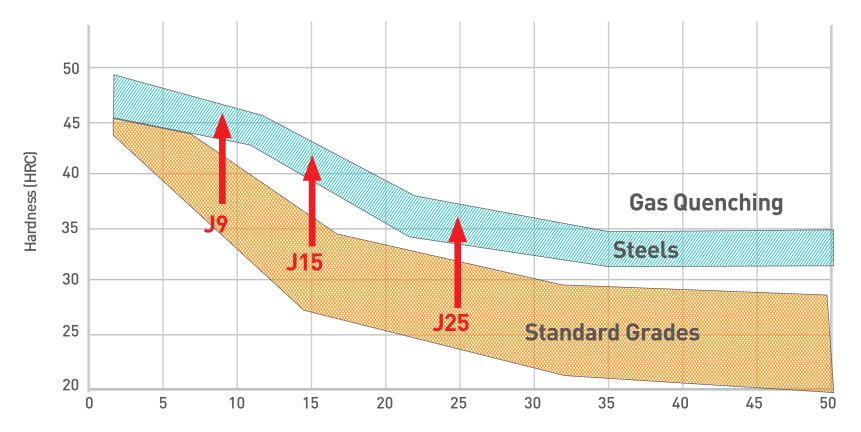


Distance to quenched end (mm)

ISOCEM vs. High Alloy Grades


• Depending on the hardenability requirements, **ISOCEM**[®] steels are designed to obtain the aimed hardness profile and minimize distortions

Ssidenor

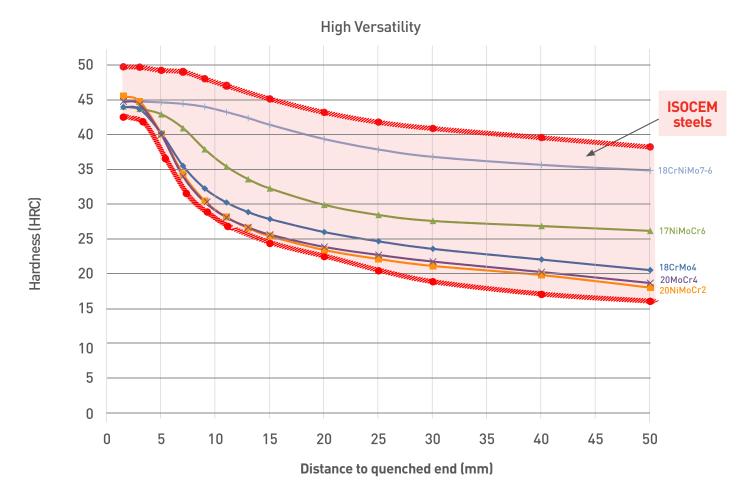

Quenching Severity

- Gases (N₂ at high pressures) have a lower severity factor than oil or water
- Gas quenchable steels need higher hardenability than oil quenchable ones

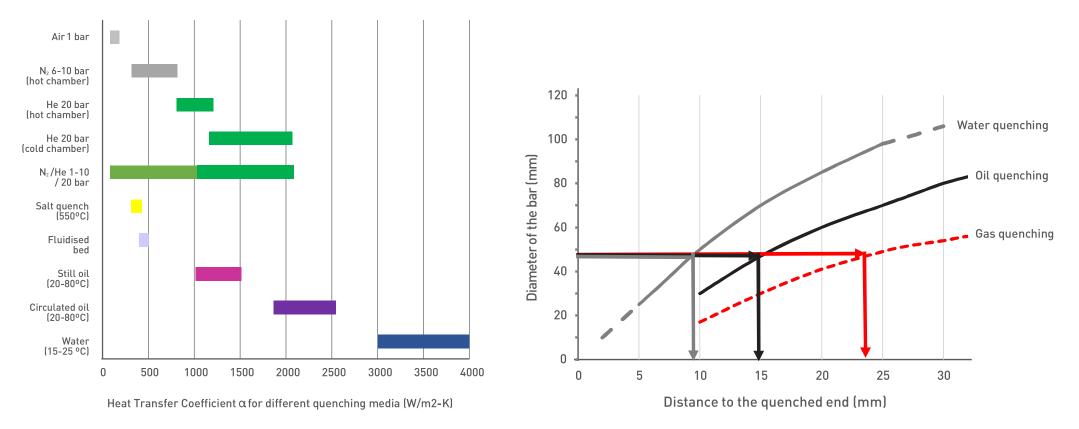


Ssidenor

Source: ASM Handbook, Volume 4A, Steel Heat Treating Fundamentals and Processes



Distorsion

• **Microstructure homogeneity** reduces distortions during quenching processes

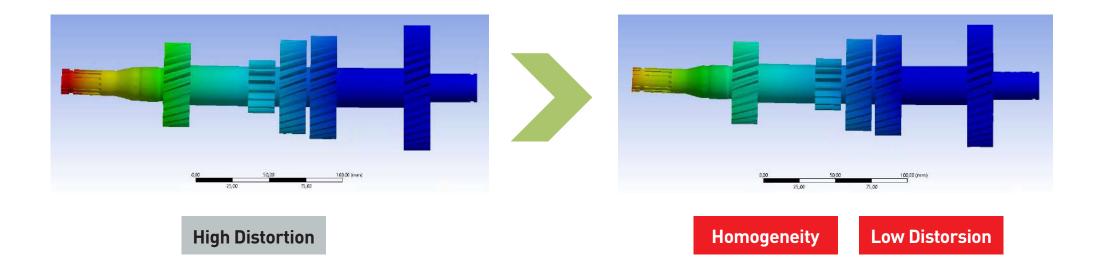




SIDENOR Solution for Case Hardennig


GRADE	% wt	С	Mn	Si	Р	Cr	Ni	Мо	V	Others *
CrV	min.	0,15	0,50	-	-	1,10	-	-	0,01	Bi, S
	max.	0,27	1,00	0,35	0,030	2,00	0,50	0,07	0,50	Ca

*Optional additions for machinability improvement: MECAMAX® technologies

- **ISOCEM**[®] is a **competitive CrV alloyed steel**, giving **similar propertie**s to a high-priced conventional oil quenched steel
- **Hardenability is tailored** to ensure the mechanical properties (core hardness and case depth) when using low severity cooling fluids
- High microstructure homogeneity reducing distortions during quenching processes

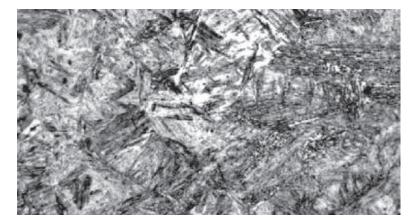


Microstructure in core Martensite 100%

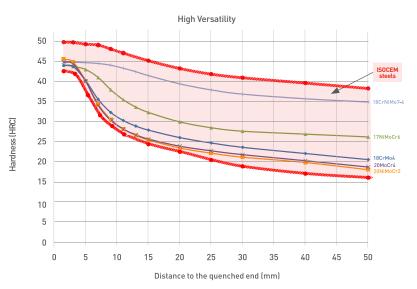



Hardenability Simulation

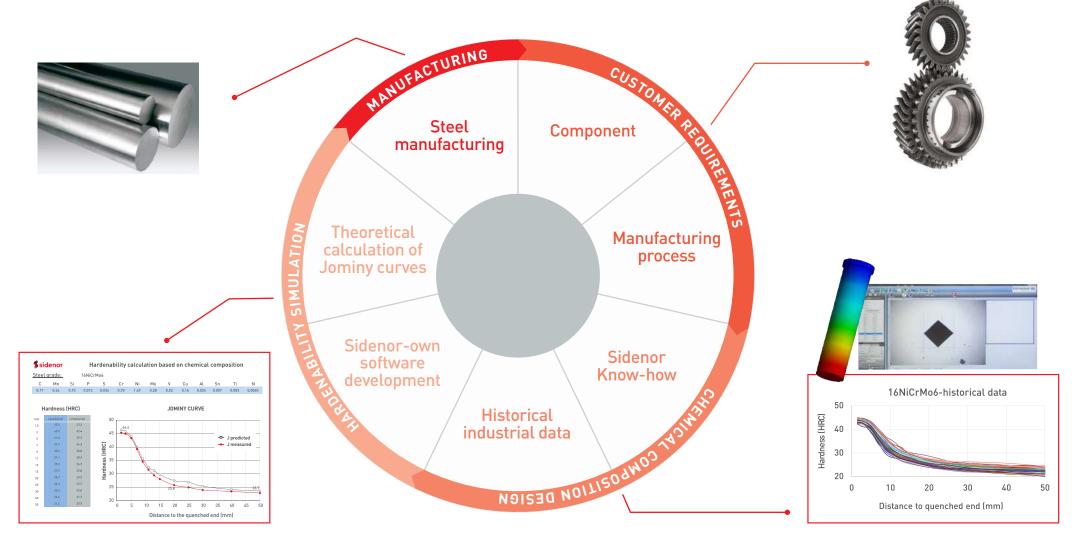



Application Field of ISOCEM® Steels

- Replacement of high alloyed grades ensuring performance
- Case hardened components **quenched with low severity quenching fluids** (high pressure gases, oils...)
- Components that exhibit **distortions** after the heat treatment



Additional Features

- SIDENOR customers can obtain additional profits from ISOCEM[®] steels combining them with other technologies:
 - NANOCEM for High Temperature Gas Carburizing
 - MECAMAX® to enhance Machinability



innobar\$

Ssidenor

